

# BEST AVAILABLE COPY

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>7</sup> : <b>A61M 15/00</b></p>	<p><b>A1</b></p>	<p>(11) International Publication Number: <b>WO 00/64520</b> (43) International Publication Date: <b>2 November 2000 (02.11.00)</b></p>
<p>(21) International Application Number: <b>PCT/FI00/00348</b> (22) International Filing Date: <b>20 April 2000 (20.04.00)</b> (30) Priority Data: <b>990914</b> <b>23 April 1999 (23.04.99)</b> <b>FI</b> (71) Applicant (for all designated States except US): <b>ORION CORPORATION [FI/FI]; Orionintie 1, FIN-02200 Espoo (FI).</b> (72) Inventors; and (75) Inventors/Applicants (for US only): <b>KOSKELA, Tommi [FI/FI]; Rasinmäenkatu 13 C 7, FIN-70780 Kuopio (FI). KOIVISTO, Antti [FI/FI]; Kettulanlahdentie 64, FIN-70460 Kuopio (FI). SILVASTI, Matti [FI/FI]; Lakkapolku 2 D, FIN-70280 Kuopio (FI). HAIKARAINEN, Jussi [FI/FI]; Isokaari 10 B 33, FIN-00200 Helsinki (FI).</b> (74) Agent: <b>ORION CORPORATION; Orion Pharma, Industrial Property Rights, P.O. Box 65, FIN-02101 Espoo (FI).</b></p>		<p>(81) Designated States: <b>AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</b>  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>

(54) Title: **POWDER INHALER FOR COMBINED MEDICAMENT**

## (57) Abstract

The invention relates to a multidose powder inhaler for the dispensing of a powdered medicament by inhalation. The device comprises two or more medicament containers for different drug powders which are inhaled as a combined medication. The device of the invention is useful, for example, in the treatment of asthma.

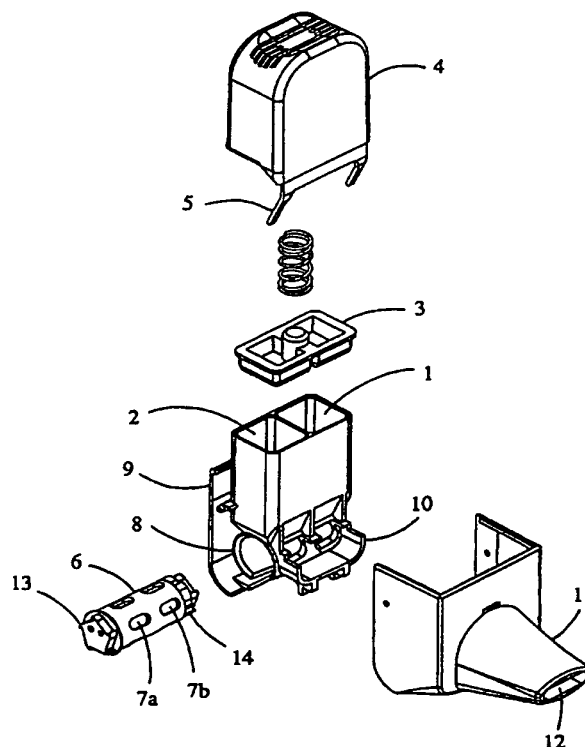

*FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## POWDER INHALER FOR COMBINED MEDICAMENT

## Background of the invention

5 The present invention relates to a device for dispensing of a powdered drug preparation by inhalation. The device is in particular a multiple-dose device without propellant gas, equipped with a metering means, which dispenses doses from a powder container. The device comprises two or more powder containers for different drug powders which can be inhaled as a combined medication. The device of the invention is useful, for example, in the treatment of asthma.

10

The administering of a powdered drug preparation by inhalation from an inhaler is known. Multiple-dose type powder inhalers comprising a flow container which holds the drug and a metering member which measures and dispenses a unit dose are also known, for example from patent publications GB 2165159, EP 79478, and EP  
15 166294. In these devices, a series of dosing recesses are notched into the surface of a cylindrical metering member, and the said member is disposed in a chamber of precisely the same shape. When the metering member is rotated, the dosing recesses in turn will move first to a position in alignment with the powder container for being filled and thereafter to a position in alignment with the inhalation channel, where-  
20 upon a unit dose will fall by gravity from the dosing recess into the inhalation channel. Thereafter the dose of medicament is inhaled from the inhalation channel. These devices have the drawback that they make overdosing of the medicament possible by allowing the dispensing of a plurality of doses in succession into the inhalation channel, whereby a multiple dose may be drawn by one inhalation.

25

Attempts have been made to solve the above-mentioned problem by using dispensing systems in which the dosing recess will not be emptied into the inhalation channel by gravity but, instead, the dose of medicament is inhaled directly from the dosing recess, as disclosed in patent publications WO 92/00771 and WO 92/09322. When  
30 the metering member is rotated, the dosing recesses will move first to a position in alignment with the flow container for filling, and then to the inhalation channel, which is shaped so that the dosing recess will be emptied under the effect of the air flow being inhaled, and thereafter, having rotated through a full 360°, back to a position in alignment with the flow container.

35

In the treatment of respiratory disorders it is often beneficial to administer a combination of drugs, e.g. combination of a bronchodilator and an anti-inflammatory drug to a patient. The devices described above are not capable to deliver more than one drug powder at a time. Even though it is in some cases possible to mix two or  
5 several drugs to a inhalable powder mixture to be administered simultaneously as a single dose, the incompatibility of the drug substances, interactions during storage or different aerosolization properties may often prevent the use of such drug mixture. Therefore, in order to inhale a combined medication a patient may have to inhale different drug powders from two powder inhalers. A multi-container powder inhaler  
10 has been earlier described in US 5,524,613. However, this device is complex and requires a pressurized air source to aid the inhalation process.

Therefore, there is a need for a simple low-cost multi-dose powder inhaler, which is able to deliver a combined medication by a single inhalation  
15

#### Summary of the invention

The present invention is related to a multi-dose powder inhaler capable of delivering a combined medicament, e.g. bronchodilator and an anti-inflammatory drug,  
20 simultaneously by a single inhalation. Rather than having a powder container for a mixture of the active ingredients, the inhaler comprises two powder containers from which doses needed for the combined administration are metered, brought to the air channel and inhaled simultaneously. Preferably the two containers contain different active ingredients. The active ingredients are in the separate containers, are brought  
25 to the air channel by separate dosing recesses and are mixed not earlier than in the air channel or in the respiratory tract of the patient during inhalation. Furthermore the inhaled air stream can be conducted via two separate aerosolization channels, one for each medicament powder. Accordingly, the differences in the aerosolization properties of each medicament powder can be taken into account and each  
30 aerosolization channel can be designed according to the properties of each medicament powder.

The inhaler of the present invention is able to deliver and deaggregate medicament powder from two or more dosing recesses simultaneously without the use of  
35 pressurized air even if used by a patient having reduced inhalation capacity.

### Brief description of the drawings

FIG. 1 is an explosive perspective view of one embodiment of the device of the invention.

- 5 FIG. 2 is a longitudinal section of the device through a first medicament container. FIG. 3a, 3b, 3c and 3d are a front view, a cross section viewed from the side, back view and a cross section viewed from above, of one embodiment of the mouth piece. FIG. 4a, 4b, 4c and 4d are a front view, a cross section viewed from the side, back view and a cross section viewed from above, of a second embodiment of the mouth  
10 piece. FIG. 5a, 5b, 5c and 5d are a front view, a cross section viewed from the side, back view and a cross section viewed from above, of a third embodiment of the mouth piece.

### 15 Detailed description of the invention

- The invention relates to a device for dispensing powdered medicament by inhalation, comprising a first and a second medicament container for receiving a plurality of medicament doses; an air channel through which air is drawn via a mouthpiece; a  
20 metering member in the form of a rotatable metering drum equipped with a first and a second dosing recess for receiving in one position a metered dose of the powdered medicament from the first and the second medicament container and for bringing in another position the metered dose of the powdered medicament from the first and the second medicament container to the air channel where the powdered medicament is  
25 aerosolized upon inhalation simultaneously from the first and the second dosing recess. In a preferred embodiment the air channel is conducted via two separate aerosolization channels.

- The first and the second medicament containers are separated so that the active  
30 ingredients can not be mixed during storage. The containers contain, in the powder form, preferably different active ingredients which are to be delivered to a patient as a combined medication. Such combined medication can be a combination of any two drugs which can be administered by inhalation. In the treatment of asthma a typical combination is a combination of a bronchodilator and an anti-inflammatory drug.  
35 The anti-inflammatory drug is preferably a steroidal anti-inflammatory drug. Suitable drug combinations include e.g. formoterol and budesonide, salmeterol and

beclomethasone dipropionate, and salmeterol and fluticasone propionate. Normally, the container has a supply of medicament for e.g. 200 doses.

5 The metering member is in a form of a rotatable drum, e.g. a cylinder, and is equipped with two series of dosing recesses notched into the surface of the metering member. In the first position of the metering member the first dosing recess is in alignment with the first medicament container and, simultaneously, the second dosing recess is in alignment with the second medicament container for being filled with the powder. When the metering member is rotated to the second position, the  
10 first and the second dosing recesses are moved to the air channel. The first and the second dosing recess may be of different size and/or shape according to the properties of each powder.

15 The air channel is preferably designed so that at the beginning of the inhalation air is led directly into the filled dosing recesses which are then intensively flushed by the inflowing air, and the powder is aerosolized simultaneously from the first and the second dosing recesses. As the powder is aerosolized directly from the dosing recesses, the possibility of overdosing by inhaling multiple doses is avoided.

20 In a preferred embodiment the inhaled air stream is conducted via two separate aerosolization channels, one for each medicament powder. The cross-sectional shape and dimensions of each aerosolization channel can then be designed according to the aerosolization and deaggregation properties of each medicament powder, e.g. to produce different air flow resistance for each medicament powder. If two separate  
25 aerosolization channels are used, the two active ingredients are mixed with each other not earlier than in the mouthpiece or, if the separate aerosolization channels are led throughout the mouthpiece, in the mouth of the patient.

30 The device of the invention is further illustrated below by way of example, with reference to Figures 1 to 5d.

In Fig. 1 the structure of one embodiment of the device of the invention is shown in an explosive view. The first and second medicament containers (1, 2) which are to be filled with the powdered medicament, have a square cross-section and conical end portions. A lid (3) closes the upper edge of the medicament containers. The cover (4)  
35 together with a flap (5), the function of which will be explained below, is adapted to cover the medicament containers (1, 2) and the lid (3). A manually rotatable metering

drum (6) having two series of five dosing recesses (7a, 7b) is mounted to the hollow cylindrical body (8), which is moulded together with the medicament containers (1, 2).

- 5 Moulded together with the medicament containers is also the rear wall (9) of the device as well as the projection (10) to receive the mouthpiece (11) with the air channel (12). The metering drum (6) has, in addition to the series of dosing recesses, teeth (13) which are engaged with the flap (5). The device is actuated by pressing down the cover, whereby the flap (5) engaged with the teeth (13) causes the metering member rotate so that rotation can only be accomplished stepwise corresponding to the peripheral distance between the dosing recesses. The detent drive of the metering member automatically aligns the dosing recesses with the outlet of the medicament container on the one side and the air channel of the mouthpiece on the other side. Furthermore, the cylindrical body has an extended detent nose (not shown) which  
10 engages into notches (14) in the metering drum such that analogue to a ratchet rotation is only possible to one direction.  
15

Fig. 2 shows a longitudinal section through the first medicament container of one embodiment of the device is shown. The cylindrical body (8) has an opening (15)  
20 through which powder can fall from the medicament container to the dosing recess when the dosing recess is in alignment with the opening (15). Another opening (16) is provided at the level of the air channel (12) for discharging the powder from the dosing recess to the air channel upon inhalation. In the position shown in Fig. 2 the upper dosing recess is just being filled with the dose of the first medical powder from the first medicament container, while the earlier filled dosing recess has turned to the  
25 air channel and is ready to be inhaled. The mouthpiece (11), through which the medical powder can be inhaled, is formed at one side of the inhalation device and has an air channel (12) for distribution of the dose of medicament from the dosing recess into the flow of breathing air. In the area where the mouthpiece is attached, air  
30 intakes (17) are provided. The intaken air is led to a slot between the opening (16) of the cylindrical body and a partition wall (19) of the mouthpiece. The slot, which is preferably moulded as a nozzle, provides strongly aligned stream of air to the dosing recess blowing the powder out from the dosing recess into the air channel without leaving any residue.  
35

Figs. 3a, b, c and d show one embodiment of the mouthpiece having a wide air channel (12) covering both the first and the second dosing recesses. In this

embodiment the active ingredients are mixed with each other as soon as they are aerosolized from the dosing recesses.

- 5 Figs. 4a, b, c and d show another embodiment of the mouthpiece, where the air channel (12) comprises two separate aerosolization channels (20, 21) which are united in the mouthpiece to the main air channel. In this embodiment the active ingredients are mixed with each other not earlier than in the main air channel in the mouthpiece.
- 10 Figs. 5a, b, c and d show yet another embodiment of the mouthpiece, where the air channel comprises two separate aerosolization channels (20, 21), which are led throughout of the mouthpiece. In this embodiment the active ingredients are mixed with each other not earlier than in the mouth or respiratory tract of the patient.
- 15 Other modifications and variations can be made to the disclosed embodiments without departing from the subject of the invention as defined in the following claims. For example, more than two medicament containers and corresponding series of dosing recesses could be used. In addition, a counter could be mounted to the inhaler to count the number of rotations of the dosing member. It is considered to be
- 20 routine for one skilled in the art to make such modifications to the device of the invention.



## Claims

1. A device for dispensing powdered medicament by inhalation, comprising a first  
and a second medicament container (1,2) for receiving a plurality of medicament  
5 doses; an air channel (12) through which air is drawn via a mouthpiece (11); a  
metering member (6) in the form of a rotatable metering drum equipped with a  
first and a second dosing recess (7a, 7b) for receiving in one position a metered  
dose of the powdered medicament from the first and the second medicament  
10 container (1,2) and for bringing in another position the metered dose of the  
powdered medicament from the first and the second medicament container (1,2)  
to the air channel (12) where the powdered medicament is aerosolized upon  
inhalation simultaneously from the first and the second dosing recess (7a, 7b).
2. A device of claim 1 wherein the air channel comprises two separate  
15 aerosolization channels (20, 21).
3. A device of claim 2, wherein the two separate aerolization channels are led  
throughout of the mouthpiece.

1/5

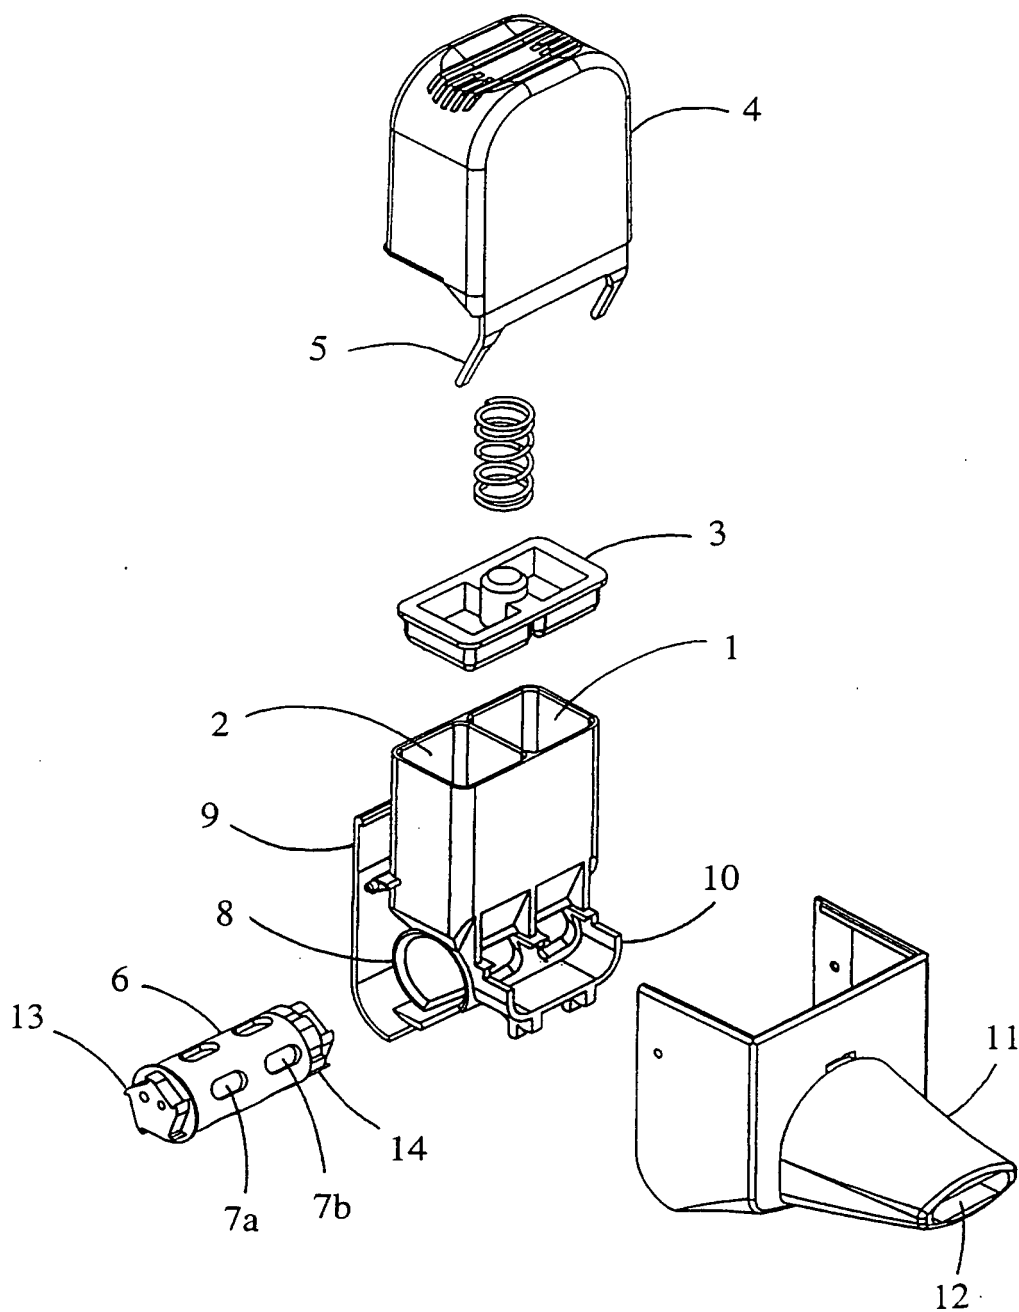


FIG. 1

2/5

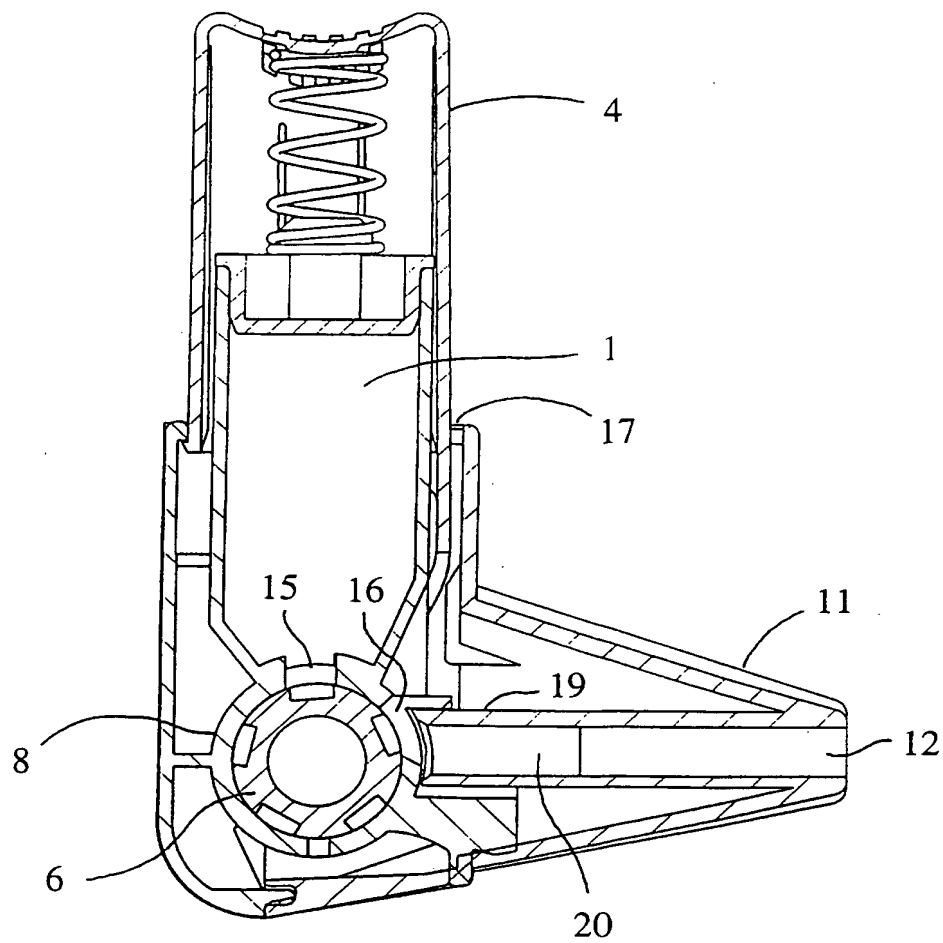


FIG. 2

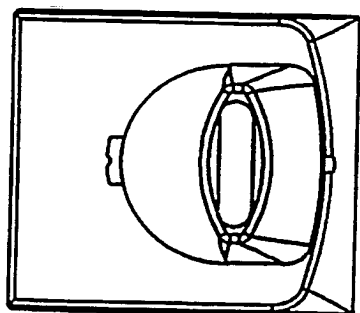


FIG. 3a

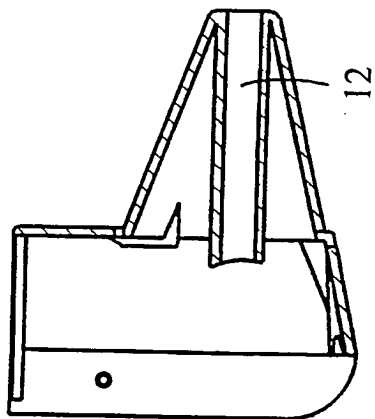


FIG. 3b

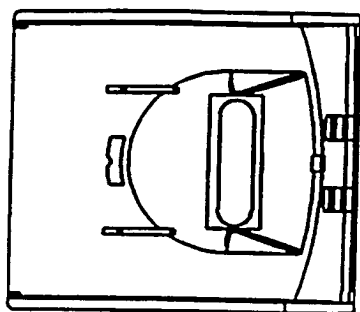


FIG. 3c

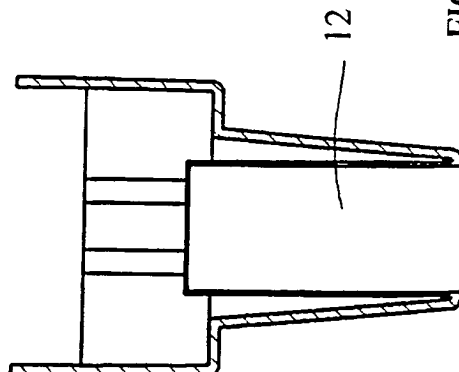


FIG. 3d

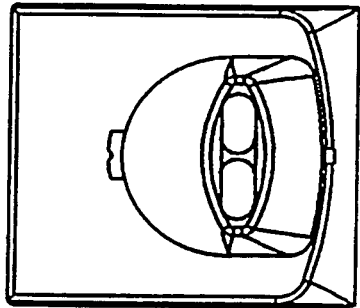


FIG. 4a

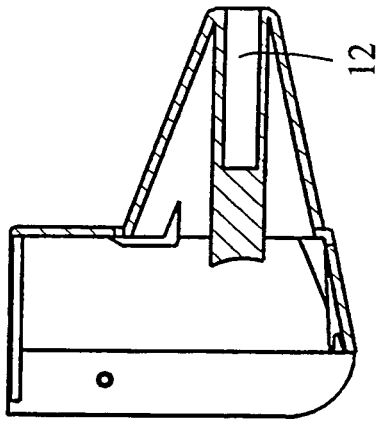


FIG. 4b

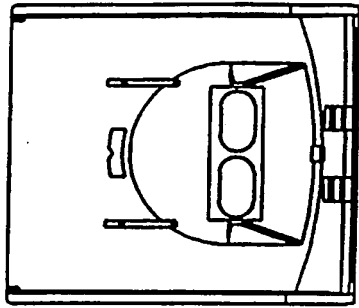


FIG. 4c

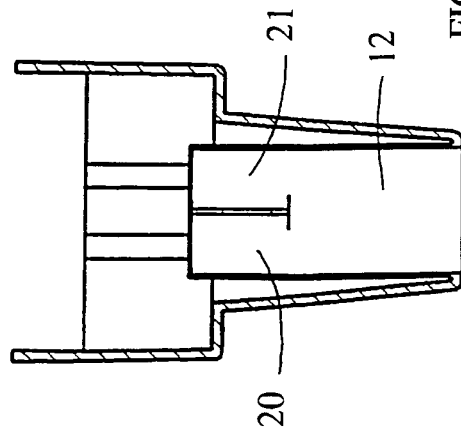


FIG. 4d

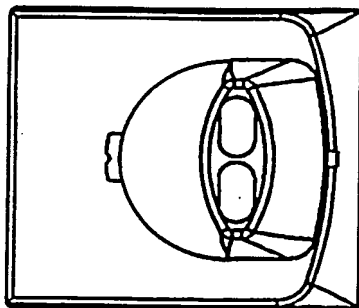


FIG. 5a

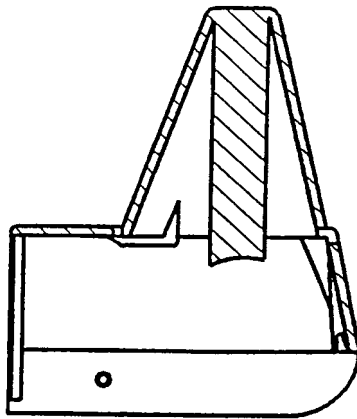


FIG. 5b

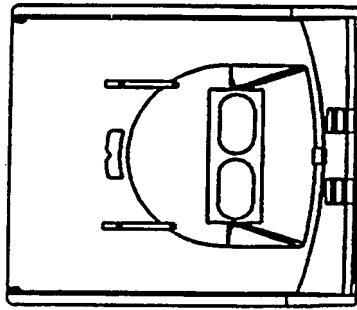


FIG. 5c

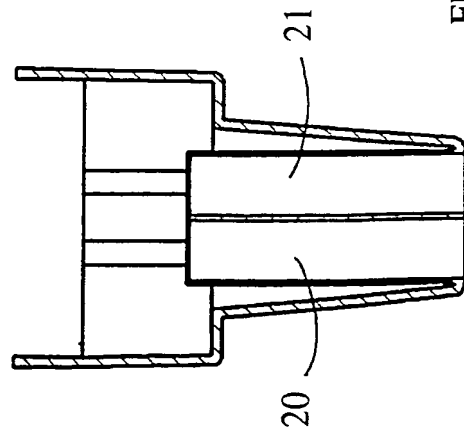


FIG. 5d

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 00/00348

<b>A. CLASSIFICATION OF SUBJECT MATTER</b>		
<b>IPC7: A61M 15/00</b> According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b>		
Minimum documentation searched (classification system followed by classification symbols)		
<b>IPC7: A61M</b>		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5524613 A (TERRY M. HABER ET AL), 11 June 1996 (11.06.96), figures 2B, 9A, abstract  -- -----	1-3
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
2 August 2000		04.09.2000
Name and mailing address of the International Searching Authority European Patent Office P.B. 5818 Patentstrasse 2 NL-2280 HV Rijswijk Tel: +31-701340-2040, Tx 31 651 600 nl Fax: +31-701340-3016		Authorized officer  Telephone No.

### Information on patent family members

International application No.

PCT/FI 00/00348

02/12/99

Patent document cited in search report:	Publication date	Patent family member(s)	Publication date
US 5524613 A	11/06/96	AU 7637694 A WO 9506491 A	22/03/95 09/03/95



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**